


PARATONER VE TOPRAKLAMA SİSTEMLERİ

YILDIRIM SAYICI

LIGHTNING COUNTER

THIẾT BỊ ĐÊM SÉT LIVA LSC LX01 (A)

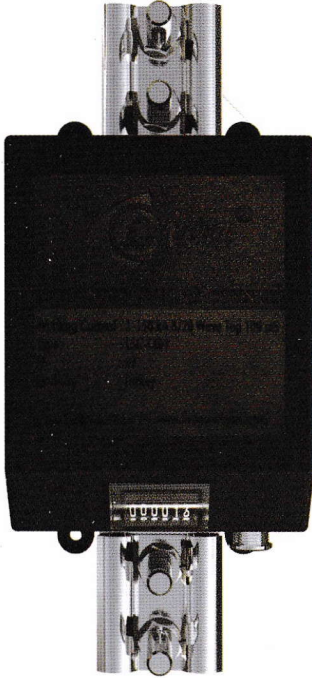

TECHNICAL PROPERTIES

Product Code	Lightning Count	Interval Minimum discharge Stream and Discharge Time Interval	Maximum discharge Stream	Input-Output Conductor	Operating temperature range	Size	Protection Class
LSC - LX01	000000 - 999999	1 kA (8/20 μ s)	100 kA	2x50 mm ² (\emptyset 2x8mm) + 3x30 mm Bara	-30 °C ile +80 °C	120 x 95 x 50 mm (200 mm with the connection clip)	IP 67

YILDIRIM SAYICI (YILDIRIM SAYACI) Lightning Counter

ÜRÜN KODU Part No	ÜRÜN İSMİ Product Name	İZOLASYON DEĞERİ Insulation Level	İLETKEN ÖLÇÜSÜ Conductor Diameter (mm)	AĞIRLIK WEIGHT (KG)	KUTU MUHTEVİYATI Box Quantity (Unit)
LSC-LX01(A) ANALOG	YILDIRIM SAYACI ELEKTROMEKANİK (TEST EDİLEBİLİR) Lightning Counter	IP67	2x Q8 mm 30x3 mm	1 kg	1 ADET YILDIRIM SAYACI 1 Piece Lightning Counter
LSC-LX01(D) DİJİTAL	YILDIRIM SAYACI DİJİTAL (TEST EDİLEBİLİR) Lightning Counter (Testable)	IP 65	2x Q8 mm (Dolu İletken İşareti) 30x3 mm (Şerit İşareti)	1 kg	1 ADET YILDIRIM SAYACI (TEST EDİLEBİLİR) 1 Piece Lightning Counter (Testable)
LSC-LX01(DS) DİJİTAL-SMS	YILDIRIM SAYACI (SMS MODÜL BAĞLANTILI) Lightning Counter with SMS Module	IP 65	2x Q8 mm (Dolu İletken İşareti) 30x3 mm (Şerit İşareti)	1,20 kg	1 ADET YILDIRIM SAYACI ve 1 ADET SMS MODÜLÜ 1 Piece Lightning Counter and 1 Piece SMS Module
LSC-LX01(DE) DİJİTAL-EPOSTA	YILDIRIM SAYACI (E-POSTA MODÜL BAĞLANTILI) Lightning Counter with e-mail Module	IP 65	2x Q8 mm (Dolu İletken İşareti) 30x3 mm (Şerit İşareti)	1,60 kg	1 ADET YILDIRIM SAYACI ve 1 ADET E-POSTA MODÜLÜ 1 Piece Lightning Counter and 1 Piece e-mail Module

● DOLU İLETKEN İŞARETİ

■ ŞERİT İLETKEN İŞARETİ

Nhà phân phối Bộ đếm sét LIVA LSC-LX01:

Công Ty TNHH Lê Khang Corp - Hotline: 0869 278 279 - www.chongset.com